

## MODEL 200 VIBRATORY DRIVER / EXTRACTOR

- \* Rifle-bored top plate delivers oil to motors without using hoses
- \* Patented one piece helical gear/eccentric eliminates gearbox failures caused by broken pins, keys, bolts or splines found in all other vibro gearboxes
- \* Giant double roller spherical bearings for super long life
- \* Center safety pin shows the line load on pile and cranes




<b>SPECIFICATIONS:</b>	<b>Model 200</b>
Eccentric moment	51 kg-m
Frequency (variable)	0 - 1.800 vpm (0 - 30 Hz)
Centrifugal force	1.797 kN
Amplitude	30 mm
Maximum line pull	1.335 kN (136 ton)
Eccentric mass	581 kg
Dynamic mass	4.308 kg
Suspended weight	6.167 kg
Length	256 cm
Width	35 cm
Height (without clamp attachment)	238 cm
Hydraulic Hose Length (standard)	45 meters
Extra hose length available in 15 meter (50 foot) sections.	

**SPECIFICATIONS**

**Model 575**

Engine	CAT C15
Maximum power	575 hp (429 kW)
Maximum drive pressure	330 bar
Maximum hyd. flow	650 lpm
Clamp pressure	350 bar
Clamp pump flow	40 lpm
Weight	6.758 kg
Length	350 cm
Width	183 cm
Height	205 cm
Fuel capacity	660 liters
Hydraulic tank capacity (main)	2.050 liters
Hydraulic tank capacity (reserve)	450 liters

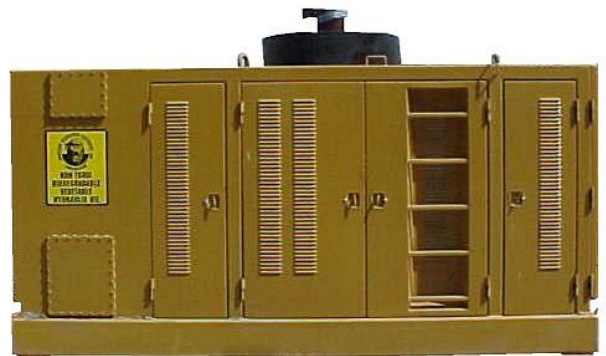

Advanced, profit generating features of the APE equipment:

- \* *Patented multistage suppressor design reduces vibro weight and height while increasing line pull by 100%.*
- \* *Vibro will not shake the crane line or boom even during vibro "starting" and "stopping".*
- \* *Center safety pin shows pile crew how much pull is on the pile.*
- \* *Only vibro on market with detachable suppressor housings to fit any height and weight requirements.*
- \* *One piece helical gear/eccentric eliminates keyways, pins, splines, and bolts inside the gearbox.*
- \* *Heavy metal enhanced eccentric design reduces internal parts by up to 75% while increasing dynamic force.*
- \* *Giant spherical bearings allow for batter operations without damage and reduce heat for extremely long life.*
- \* *Computer designed gearbox is perfectly balanced with lowest center of gravity on the market.*
- \* *Rifle bored top plate eliminates all hoses on suppressor and to hydraulic motors.*
- \* *Heavy duty clamp cylinder is machined from one piece of solid steel to eliminate o-rings and bolt-on guards.*
- \* *Power unit comes standard with spare hydraulic tank, tool kit, dual controls on pendant and control panel.*
- \* *Very simple open loop hydraulic system with highest quality valves with lighted indicators.*
- \* *Variable flow in both directions for use on drills, winches, hydraulic hammers and other attachments.*
- \* *Oversized radiator and hydraulic oil cooler with proven performance in the heat of Saudi Arabia.*
- \* *Engines comply with TIER III standards.*

APE Holland BV, P.O. Box 34, 7990 AA Dwingeloo, The Netherlands  
 Tel.: +31(0) 593 54 08 91, Fax: +31(0) 593 54 27 84, [www.apeholland.com](http://www.apeholland.com), [info@apeholland.com](mailto:info@apeholland.com)

Due to constant improvements we must advise you to call APE Holland for the latest available literature and specifications. 06/06

APE HOLLAND